


## Bolphane® BTTXF 130 Soft cross-linked shrink film

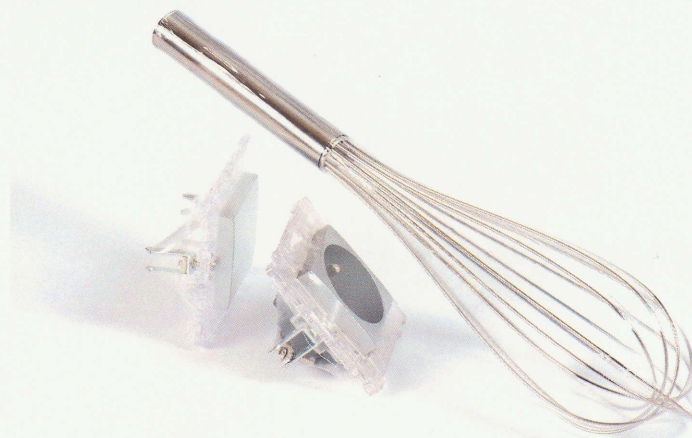

- Low shrink force to avoid the distortion of flexible products
- High percentage of free shrink at low temperature to conform to odd-shaped items
- Superior elongation and tear strength
- Broad operating window allowing use on a wide range of equipments
- Hot slip properties

**Bolphane® BTTXF 130** is manufactured from a proprietary cross-linked process and is formulated with high-tech resins – such as the latest generation of metallocenes.

**Bolphane® BTTXF 130** is designed to wrap items which require a combination of high shrinkage and a low shrink force.

» Please contact us for any specific request.

### TECHNICAL FEATURES

Grade	130	
Roll length (m)	Singlewound	3 250
	Centerfolded	1 625
Gloss at 20°	115	
Haze (%)	3,5	
	<b>LD*</b>	<b>TD**</b>
Elongation at break (%)	130	130
Tensile strength (kg/cm <sup>2</sup> )	1 100	1 100
Shrinkage (%)	at 93°C	28
	at 120°C	77
	30	78

\* LD: Longitudinal Direction – \*\* TD: Transverse Direction